

JCO2 Rec'd PCT/PTO 01 APR 2002

Attorney Docket No. 02058

U.S. Application No (if known,
see 37 CFR 1.51) **10/08957**

107088534

INTERNATIONAL FILING DATE
September 27, 2000

PRIORITY DATE CLAIMED
October 1, 1999

METHOD AND APPARATUS USING HEAT FLUX TO DETECT OR MEASURE A DEPOSIT LIABLE TO FORM IN A FLUID-TRANSPORT PIPE

Thierry Romanet, Jean-Luc Volle & Jean Daniel Reber

Applicant herewith submits to the United States Designated Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
 - a. ☐ are transmitted herewith (only if not required by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11 to 16 below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ As assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
- ☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☐ Other items or information:



23338

PATENT TRADEMARK OFFICE

1013 Rec'd PCT/PTO 0 2 APR 2002
CALCULATIONS PTO USE ONLY

| | | | | | |
|---|--------------|--------------|-----------|------------------------|----|
| 17. <input checked="" type="checkbox"/> The following fees are submitted: | | | | | |
| BASIC NATIONAL FEE (37 CFR 1.492 (a)(1)-(5): | | | | | |
| Neither international preliminary examination fee (37 CFR 1.482) | | | | | |
| Nor international search fee (37 CFR 1.445(a)(2) paid to USPTO | | | | | |
| And International Search Report not prepared by EPO or JPO..... \$1,040.00 | | | | | |
| International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by EPO or JPO.....\$890.00 | | | | | |
| International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International search fee (37 CFR 1.445(a)(2)) paid to USPTO..... \$740.00 | | | | | |
| International preliminary examination fee paid to USPTO (37 CFR 1.482) But all claims did not satisfy provisions of PCT Article 33(1)-(4).....\$710.00 | | | | | |
| International preliminary examination fee paid to USPTO (37 CFR 1.482) And all claims satisfied provisions of PCT Article 33(1)-(4)..... \$100.00 | | | | | |
| ENTER APPROPRIATE BASIC FEE AMOUNT = | | | | \$890.00 | |
| Surcharge of \$130.00 for furnishing oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e). | | | | \$130.00 | |
| CLAIMS | NUMBER FILED | NUMBER EXTRA | RATE | | |
| Total Claims | 12 -20= | | X \$18.00 | \$ | |
| Independent Claims | 1 -3= | | X \$84.00 | \$ | |
| MULTIPLE DEPENDENT CLAIM(S) (if applicable) | | | | \$ | |
| TOTAL OF ABOVE CALCULATIONS = | | | | \$1020.00 | |
| Reduction of 1/2 for filing by small entity, if applicable. A Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28). | | | | \$ | |
| SUBTOTAL = | | | | \$1020.00 | |
| Processing fee of \$130.00 for furnishing English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f). | | | | \$ | |
| TOTAL NATIONAL FEE = | | | | \$1020.00 | |
| Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). | | | | \$ | |
| TOTAL FEES ENCLOSED = | | | | \$1020.00 | |
| | | | | Amount to be refunded: | \$ |
| | | | | charged: | \$ |

- a. ☒ A check in the amount of \$1020.00 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. 04-0753 in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 04-0753. A duplicate copy of this sheet is enclosed.
- d. ☐ A payment of \$ _____ is made by credit card. A Credit Card Payment Form (PTO-2038) is attached hereto. The Commissioner is hereby authorized to charge payment of any additional filing fees required under 37 CFR 1.16 or any patent application processing fees under 37 CFR 1.17, or credit any over payment to the credit card account shown on the attached Credit Card Payment Form. Refund of all amounts overpaid, including those of twenty-five dollars or less, is specifically requested. Any fees not accepted by the credit card shown on Form PTO-2038 may be charged to Deposit Account No. 04-0753.

SEND ALL CORRESPONDENCE TO:
Dennison, Schultz & Dougherty
612 Crystal Square 4
1745 Jefferson Davis Highway
Arlington, VA 22202-3417
Telephone (703) 412-1155 Ext. 23
Facsimile (703) 412-1161

SIGNATURE
Ira J. Schultz

NAME
28666

REGISTRATION NUMBER

Dkt. 02058

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of:

Group Art Unit:

THIERRY ROMANET et al

Examiner:

Serial No.: US National Phase of
PCT/FR00/02670

Filed: concurrently herewith

For: METHOD AND APPARATUS USING HEAT FLUX
TO DETECT OR MEASURE A DEPOSIT LIABLE
TO FORM IN A FLUID-TRANSPORT PIPE

PRELIMINARY AMENDMENT

Honorable Assistant Commissioner for Patents
Washington, DC 20231

Sir:

Before calculation of the filing fee, please amend the
above-identified application as follows:

IN THE CLAIMS:

Please amend the claims as set forth hereinbelow and in
the attached appendix:

1. (Amended) A method of detecting a deposit (D) that
might form inside a fluid transport pipe (2), the method
comprising:

- applying a thermal gradient (G) to at least one "active"
zone (Za) of the outside surface of the pipe;
- measuring the heat flux (F) in at least one zone (Zm) of

the outside surface of the pipe that is situated at a given distance from the active zone in consideration of the length of the pipe; and

· detecting when the heat flux corresponding at least in part to the applied thermal gradient and transmitted by the pipe exceeds a determined threshold indicative of the presence of a deposit inside the pipe.

3. (Amended) A method according to claim 1 comprising applying a thermal gradient (G) in an active zone (Za) constituting a circumference of the pipe.

4. (Amended) A method according to claim 1, comprising applying a thermal gradient (G) via a heat production source (3) fitted to or integrated in the pipe.


6. (Amended) A method according to claim 1 comprising measuring the heat flux (F) by means of a heat flux sensor (7) fitted to or integrated in the pipe.

10. (Amended) An installation according to claim 8, characterized in that the control and monitoring means (5) comprise means for detecting the peak values of the measured heat flux signal so that the peak-to-peak value of the signal can be compared with the threshold value indicating the presence of a deposit inside the pipe.

REMARKS

The claims have been amended to delete all multiple dependencies, and to generally place the claims in better form for US practice.

Respectfully submitted,



Ira J. Schultz
Registration No. 28666

DENNISON, SCHEINER & SCHULTZ
1745 Jefferson Davis Highway, Suite 612
Arlington, VA 22202-3417
(703) 412-1155, ext. 23

APPENDIX

IN THE CLAIMS:

1. (Amended) A method of detecting a deposit (D) that might form inside a fluid transport pipe (2), the method [being characterized in that it consists] comprising:

- [in] applying a thermal gradient (G) to at least one "active" zone (Za) of the outside surface of the pipe;

- [in] measuring the heat flux (F) in at least one zone (Zm) of the outside surface of the pipe that is situated at a given distance from the active zone in consideration of the length of the pipe; and

- [in] detecting when the heat flux corresponding at least in part to the applied thermal gradient and transmitted by the pipe exceeds a determined threshold indicative of the presence of a deposit inside the pipe.

3. (Amended) A method according to claim 1 [or claim 2, characterized in that it consists in] comprising applying a thermal gradient (G) in an active zone (Za) constituting a circumference of the pipe.

4. (Amended) A method according to [any one of claims 1 to 3, characterized in that it consists in] claim 1, comprising applying a thermal gradient (G) via a heat production source (3) fitted to or integrated in the pipe.

6. (Amended) A method according to claim 1 [or claim 5,

characterized in that it consists in] comprising measuring the heat flux (F) by means of a heat flux sensor (7) fitted to or integrated in the pipe.

10. (Amended) An installation according to claim 8 [or claim 9], characterized in that the control and monitoring means (5) comprise means for detecting the peak values of the measured heat flux signal so that the peak-to-peak value of the signal can be compared with the threshold value indicating the presence of a deposit inside the pipe.

2/pth

10/088534
JC13 Rec'd PCT/PTO 02 APR 2002

A METHOD AND APPARATUS USING HEAT FLUX TO DETECT OR MEASURE A DEPOSIT LIABLE TO FORM IN A FLUID-TRANSPORT PIPE

TECHNICAL FIELD

The present invention relates to the field of detecting a deposit or a solid phase liable to form in a pipe for transporting a fluid, in the general sense.

A preferred application of the invention lies in avoiding the risks of clogging in fluid transport pipes, and in particular in pipes for transporting multiphase petroleum fluids.

It is known that such multiphase petroleum fluids can lead to the formation of a solid phase such as hydrates, paraffins, asphaltenes, or other mineral deposits. The solid phase can be deposited at one or more locations in the pipe, thereby reducing flow rate to such an extent as to disturb hydrocarbon transport completely.

Present economic circumstances are encouraging operating companies to significantly reduce investment and operating costs, in particular, by improved control and by seeking to eliminate any risk of such a solid phase being deposited, both in processing installations and in installations for transporting hydrocarbons.

PRIOR ART

In an attempt to remedy the problem of such solid phase deposition inside a hydrocarbon transport pipe, provision is made to use preventative solutions, one of which consists in adding inhibitor additives suitable for transporting such hydrocarbons on a more or less systematic basis. Another technique consists in regularly performing scraping operations

inside pipes as a precaution. Such techniques, which are often combined, are expensive and are not totally satisfactory, particular because of the difficulties involved in planning them. Thus, in the event of the operations of scraping and/or adding inhibitor agents being poorly planned, problems arise associated with:

- production being lost by pipes becoming clogged;
- safety, with the risk of accidents associated with a hydrate plug appearing, or failure of valves to operate, or with restarting units that have become blocked by high-paraffin crudes gelling; and

- with commercial markets being lost by failure to comply with sales contract conditions due to production being stopped.

Such preventative techniques are particularly expensive, given the lack of any real data concerning the quantity of deposit that has already formed inside a pipe, so scraping operations are performed at intervals that are very close together and/or inhibitor additives are added in quantities that are greater than necessary. In an attempt to remedy those drawbacks, studies have been undertaken in order to improve knowledge about the conditions under which solid phases (hydrates, paraffins, and asphaltenes) form within a multiphase flow. Those studies seek to develop models for predicting deposition profiles along a pipe, or indeed to improve inhibitor additives suitable for enabling "difficult" crudes to be transported.

Another type of technique that is presently poorly developed relates to seeking to measure the quantity of deposit that has formed inside a pipe. In an attempt to obtain a real measurement of the quantity of a deposit that might have formed inside a pipe, proposals have been made to install measuring

equipment and internal inspection equipment inside a pipe, or to introduce such equipment into a pipe. However, such a technique necessarily disturbs flow, and it need not be capable of performing measurement continuously or of providing a measurement that is reliable. On the same lines, proposals have been made to measure the quantity of deposit by means of ultrasound detectors. However it appears that the acoustic impedances of a deposit and of hydrocarbons being transported are substantially identical, so such a technique is not very reliable.

There thus exists a need for a technique making it possible, at selected points in the pipe, to detect a deposit or to measure the thickness of any such deposit that might be present inside a fluid transport pipe, regardless of whether the fluid is liquid and/or gaseous, with said technique not disturbing the flow and not being intrusive, while nevertheless being simple and effective.

SUMMARY OF THE INVENTION

To achieve such an object, the invention provides a method of detecting a deposit that might form inside a fluid transport pipe. The method of the invention consists:

- in applying a thermal gradient to at least one "active" zone of the outside surface of the pipe;

- in measuring the heat flux in at least one zone of the outside surface of the pipe that is situated at a given distance from the active zone in consideration of the length of the pipe; and

- in detecting when the heat flux corresponding at least in part to the applied thermal gradient and transmitted by the pipe exceeds a determined threshold indicative of the presence

of a deposit inside the pipe.

In an advantageous implementation, the invention also seeks to determine the thickness of the deposit by comparing the measured heat flux with the heat flux measured during a calibration stage.

The invention also seeks to provide an installation for implementing the method of detecting a deposit that might form inside a fluid transport pipe. According to the invention, the installation comprises:

- at least one production source for producing a thermal gradient, the source being for mounting on an "active" zone of the outside surface of the pipe;

- at least one measurement sensor for measuring heat flux, the sensor being for mounting on a zone of the outside surface of the pipe situated relative to the active zone at a given distance in consideration of the length of the pipe; and

- control and monitoring means connected to the production source and to the measurement sensor, and adapted to detect when the heat flux corresponding at least in part to the applied thermal gradient and transmitted by the pipe exceeds a determined threshold indicative of the presence of a deposit inside the pipe.

Various other characteristics appear from the following description made with reference to the accompanying drawings which show embodiments and implementations of the invention as non-limiting examples.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a diagrammatic view showing an embodiment of a detection installation in accordance with the invention.

Figure 2 is a curve showing the applied thermal gradient

as a function of time.

Figure 3 is a curve showing the measured heat flux signal as a function of time in the presence and in the absence of a deposit inside the pipe.

BEST METHOD OF PERFORMING THE INVENTION

As can be seen more clearly in Figure 1, the installation 1 of the invention is adapted to detect a deposit, in the general sense, that might form inside a fluid transport pipe 2, in particular a petroleum transport pipe. In conventional manner, transporting multiphase petroleum fluids runs the risk of forming a deposit or a solid phase such as hydrates, paraffins, asphaltenes, or mineral deposits inside the pipe, as represented diagrammatically by reference D.

In accordance with the invention, the installation 1 has at least one source 3 for producing a thermal gradient G. Such a production source 3 is for mounting in an "active" zone Za of the outside surface of the pipe 2. It should be considered that the source 3 delivers or extracts a determined quantity of heat over a selected zone of the pipe 2 by any suitable means. By way of example, the quantity of heat delivered to the pipe 2 can be produced by the Joule effect, the Pelletier effect, or the Seebeck effect. In an embodiment, the source 3 for producing a thermal gradient can be constituted in the form of a flexible band including technical means for applying the thermal gradient. Such a band can either be fitted onto the pipe 2 beneath the thermal lagging or coating that generally surrounds petroleum product transport pipes, or else it can be integrated directly on the pipe while it is being manufactured.

The production source 3 is connected via a link 4 to control and processing means 5 adapted to control the quantity

CLASSIFICATION

of heat applied and the length of time it is applied. In an embodiment shown more particularly in Figure 2, the temperature gradient G is applied in an optionally regular determined cycle having periods during which the thermal gradient is applied interleaved with periods during which a zero or an opposite-sign thermal gradient is applied.

It should also be considered that the thermal gradient G is applied over an active zone Za of the pipe 2 of greater or lesser extent in the length direction of the pipe. In like manner, this active zone Za can constitute the entire circumference of the pipe 2. Naturally, particularly with pipes of large diameter, provision could be made to apply the thermal gradient over a plurality of determined angular sectors of a circumference of the pipe.

The installation 1 of the invention also comprises at least one sensor 7 for measuring heat flux F and designed to be mounted on a zone Zm of the outside surface of the pipe 2 that is situated at a given distance from the active zone Za in the length direction of the pipe 2. This "measurement" zone Zm for measuring heat flux is thus situated at a determined distance from the active zone Za along the longitudinal axis A of such a pipe 2. In other words, the production source 3 and the measurement sensor 7 are situated on two different right cross-sections of the pipe 2. It should be observed that the measurement sensor 7 can be installed upstream or downstream from the source 3 relative to the direction in which the fluid flows inside the pipe 2.

The heat flux measurement sensor 7 is mounted so as to measure heat exchange (i.e. in watts per square centimeter (W/cm^2)) between the pipe 2 and the fluid flowing inside the pipe. It should be observed that the measurement sensor 7 is

adapted to be thermally transparent insofar as deposition problems are intimately related to temperature values measured at the periphery of the pipe 2. In other words, the measurement sensor 7 is designed to avoid locally modifying the temperature profile outside the pipe 2. Furthermore, given the fact that crude oil transport pipes 2 are generally thermally isolated by lagging or coating, such a measurement sensor 7 is installed beneath such lagging, so as to avoid altering the thermal environment of the pipe.

In an embodiment, such a sensor 7 for measuring heat flux is constituted by a flexible band such as a neoprene band having one or more flux meters mounted thereon so as to be distributed around the circumference of the pipe. When a flux meter is mounted on a given sector of the pipe, it can measure the heat exchange between the fluid being transported and said zone of the pipe. Such a band can either be fitted onto the pipe 2 beneath the thermally insulating lagging, or else can be integrated directly in the pipe during manufacture thereof. Such a measurement sensor 7 can also include a probe for measuring the outside surface temperature of the pipe 2.

The measurement sensor 7 is connected to the control and processor means 5 via a link 8 of any type. The control and processor means 5 are adapted as a function of the applied thermal gradient and of the measured heat flux to determine whether a deposit D is present inside the pipe 2, using the method described below.

The installation 1 described above is used as follows.

The control and processor means 5 use the source 3 to apply a thermal gradient G to the active zone Z_a of the pipe 2. The applied thermal gradient G is controlled both in power and in time so as to be identifiable compared with any thermal

variations that might be due to the environment outside the pipe or to the fluid it is transporting. In particular, the applied thermal gradient takes account of the distance between the source 3 and the measurement sensor 7. By way of example, the thermal gradient is applied cyclically. An example showing one possible form of applied thermal gradient G is given in Figure 2.

At least after the thermal gradient G has been applied, the control and processor means 5 use the sensor 7 to measure the heat flux in a zone Z_m of the outside surface that is situated at a distance from the active zone Z_a . In the absence of any deposit inside the pipe 2, the injected thermal gradient is transmitted almost in full to the fluid traveling along the pipe 2. Given the distance between the measurement sensor 7 and the source 3 producing the thermal gradient, the heat flux detected in the measurement zone Z_m is practically unmeasurable. An example of a heat flux signal F_1 for a pipe 2 having no deposit is shown in Figure 3.

When a deposit D is present inside the pipe 2, the deposit provides thermal insulation between the pipe 2 and the transported fluid. The thermal gradient injected via the active zone Z_a is not transmitted to the fluid but is transmitted mainly into the structure of the pipe 2 itself. The heat flux is thus transmitted to the measurement zone Z_m of the measurement sensor 7. An example of the heat flux signal F_2 as measured when a deposit D is present inside the pipe is shown in Figure 3. This measured thermal gradient corresponds, at least in part, to that applied and transmitted by the pipe 2.

The value of the measured heat flux is compared with a determined threshold value representative of the presence of a

deposit D inside the pipe 2. If the measured heat flux value reaches or exceeds this threshold value, then the control and processor means 5 indicate the presence of such a deposit by any appropriate means, e.g. in the form of a chart, an audible signal, and/or a light signal, a message, etc.

The method of the invention thus seeks to apply a thermal gradient to at least one outside surface zone of the pipe and to measure the heat flux at a given distance from the application zone, at least while said thermal gradient is being applied, thereby determining whether the heat is diffused into the fluid (no deposit), or is transmitted by the pipe (a deposit is present which acts as thermal insulation). Thus, when a deposit D is present, there exists a correlation between the application of a thermal gradient and the appearance of a heat flux at a given distance from the point of application.^o It should be observed that using a series of flux meters, each associated with a respective sector of the circumference of the pipe, makes it possible to obtain measurements which take account of various different flow regimes that can occur for a fluid that comprises a liquid phase and a gaseous phase. In addition, using a plurality of spaced-apart flux meters makes it possible to detect the presence of a deposit for each of the measurement zones associated with a respective flux meter.

In an advantageous embodiment, the subject matter of the invention also makes it possible to determine the thickness of such a deposit D by comparing the measured heat flux with the heat flux measured during a calibration stage. In a particular embodiment, the peak values of the measured heat flux can be detected so as to enable the peak-to-peak value of the signal to be compared with the threshold value indicating that a deposit is present inside the pipe.

PERCEPTIBILITY OF INDUSTRIAL APPLICATION

The subject matter of the invention thus makes it possible to detect the presence of a solid phase or a deposit inside a pipe, and also to measure the thickness of such a deposit.

5 Such detection or measurement can be performed easily by mounting the measurement sensor 7 and the heat production source on various types of flexible or rigid pipe, and doing so in an integrated manner or in a fitted-on manner. Such mounting can be applied to fluid transport pipes, in particular
10 to off-shore pipes located at great depths. Naturally, the control and processor means 5 can easily be at a distance from the pipe 2 by using links 4, 8. Furthermore, such an installation can be combined with another technique for measuring the quantity of a deposit, e.g. a vibratory technique
15 as explained in patent application FR 2 754 898.

The invention is not limited to the embodiments described and shown, since numerous modifications can be made thereto without going beyond its ambit.

CLAIMS

1/ A method of detecting a deposit (D) that might form inside a fluid transport pipe (2), the method being characterized in that it consists:

· in applying a thermal gradient (G) to at least one "active" zone (Za) of the outside surface of the pipe;

· in measuring the heat flux (F) in at least one zone (Zm) of the outside surface of the pipe that is situated at a given distance from the active zone in consideration of the length of the pipe; and

· in detecting when the heat flux corresponding at least in part to the applied thermal gradient and transmitted by the pipe exceeds a determined threshold indicative of the presence of a deposit inside the pipe.

2/ A method according to claim 1, characterized in that it consists in applying a thermal gradient (G) in a determined cycle.

3/ A method according to claim 1 or claim 2, characterized in that it consists in applying a thermal gradient (G) in an active zone (Za) constituting a circumference of the pipe.

4/ A method according to any one of claims 1 to 3, characterized in that it consists in applying a thermal gradient (G) via a heat production source (3) fitted to or integrated in the pipe.

5/ A method according to claim 1, characterized in that it consists in measuring the heat flux (F) at one or more sectors of a circumference of the pipe.

6/ A method according to claim 1 or claim 5, characterized in that it consists in measuring the heat flux (F) by means of a heat flux sensor (7) fitted to or integrated in the pipe.

5 7/ A method according to claim 1, characterized in that it consists in determining the thickness of the deposit (D) by comparing the measured heat flux with the heat flux measured during a calibration stage.

10 8/ An installation for implementing a method according to claim 1, in order to detect a deposit (D) that might form inside a fluid transport pipe (2), the installation being characterized in that it comprises:

15 · at least one production source (3) for producing a thermal gradient (G), the source being for mounting on an "active" zone (Za) of the outside surface of the pipe;

20 · at least one measurement sensor (7) for measuring heat flux (F), the sensor being for mounting on a zone (Zm) of the outside surface of the pipe situated relative to the active zone at a given distance in consideration of the length of the pipe; and

25 · control and monitoring means (5) connected to the production source (3) and to the measurement sensor (7), and adapted to detect when the heat flux corresponding at least in part to the applied thermal gradient and transmitted by the pipe exceeds a determined threshold indicative of the presence of a deposit inside the pipe.

30 9/ An installation according to claim 8, characterized in that the monitoring means (5) comprise means for determining the thickness of the deposit by comparing the measured heat flux

and the heat flux measured during a calibration stage.

10/ An installation according to claim 8 or claim 9,
characterized in that the control and monitoring means (5)
5 comprise means for detecting the peak values of the measured
heat flux signal so that the peak-to-peak value of the signal
can be compared with the threshold value indicating the
presence of a deposit inside the pipe.

10 11/ An installation according to claim 8, characterized in that
the production source (3) for producing a heat gradient is
constituted in the form of a flexible band fitted to or
integrated in the pipe.

15 12/ An installation according to claim 8, characterized in that
the measurement sensor for measuring heat flux (7) is formed by
a flexible band equipped with one or more flux meters and
fitted to or integrated in the pipe.

[illegible]

5

10

15

20

25

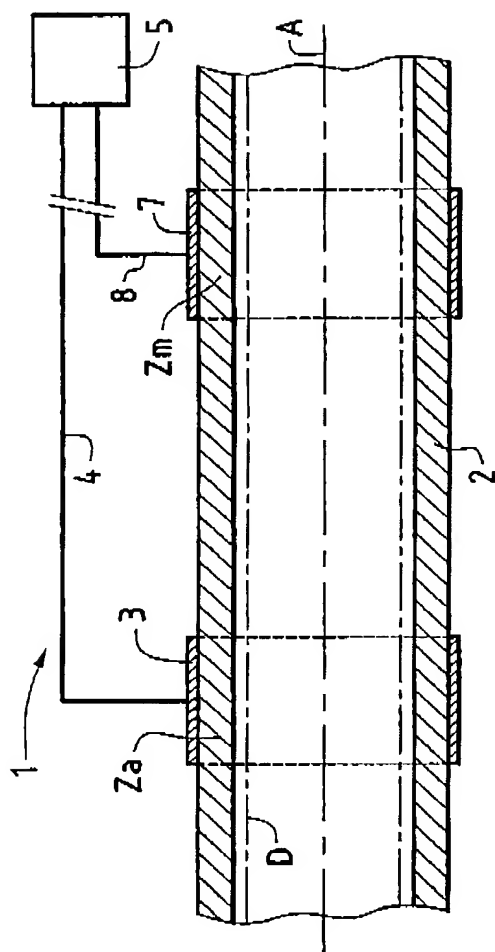


FIG.1

FIG.2



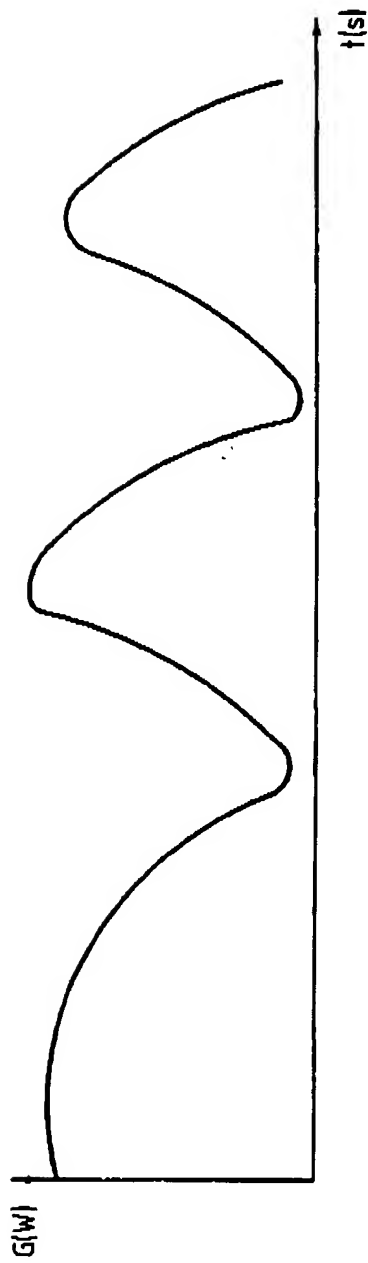


FIG.3

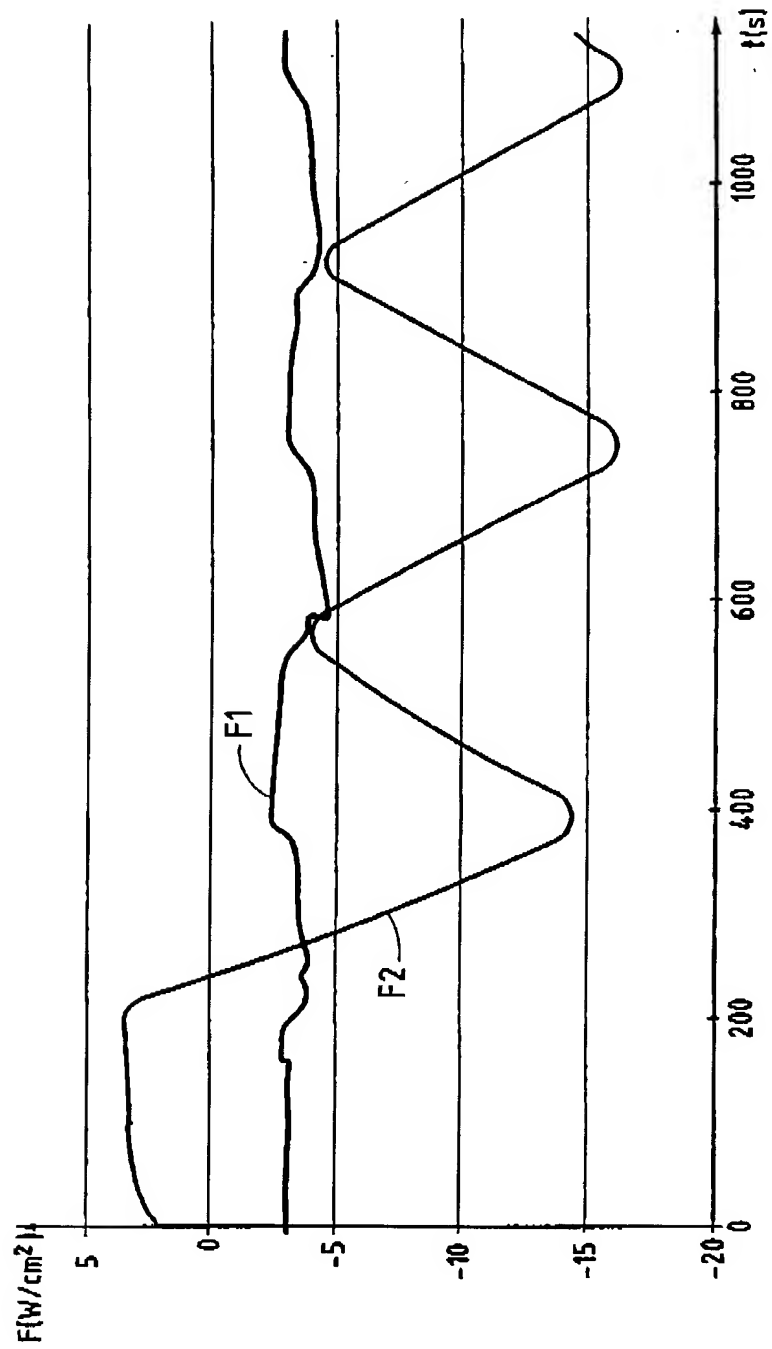

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION



1002534 108202 27.

#5

Docket No. _____

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled A method and apparatus using heat flux to detect or measure a deposit liable to form in a fluid-transport pipe

specification of which (check one) _____ is described and claimed in PCT International Application 00/02 670 filed on (MM/DD/YYYY) 27.09.00, amended on _____ (if applicable) (OR) _____ is described in United States Application Number _____ filed on (MM/DD/YYYY) _____ (OR) _____ is attached hereto.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, any foreign application for patent or inventor's certificate, or any PCT international application having a filing date before that of the application on which priority is claimed.

| Prior Foreign Application Number(s) | Country | Foreign Filing Date (MM/DD/YYYY) | Priority Claimed? Yes No |
|-------------------------------------|---------|----------------------------------|-----------------------------|
| -99 12 531 | FRANCE | 1 OCTOBER 1999 | X |
| | | | |

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States Provisional Application(s) listed below.

| | |
|--|--|
| | |
| | |

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s), or 365(c) of any PCT International application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

| | | |
|--|--|--|
| | | |
| | | |
| | | |

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Donald L. Dennison
Burton Scheiner

Reg. No. 19920
Reg. No. 24018

Ira J. Schultz
Malcolm MacDonald

Reg. No. 28666
Reg. No. 40250

DIRECT ALL CORRESPONDENCE TO:
DENNISON, SCHEINER & SCHULTZ
1745 Jefferson Davis Highway, Suite 612
Arlington, Virginia 22202-3417

DIRECT TELEPHONE CALLS TO:
(703)412-1155 Ext.
(703)412-1161 (fax)

Customer No. 2338

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. §1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor ROMANET Thierry
(First, Middle, Family Name or Surname)

Inventor's signature Romanet Thierry Date JUNE 11, 2002

Residence 2 Allée des Jasmins - 13821 LA PENNE s/HUVEAUME (FR) Citizenship French
(City, State, Country)

Full Post Office Address 2 Allée des Jasmins - 13821 LA PENNE s/HUVEAUME (FRANCE)

2 - 00

Full name of second joint inventor VOLLE Jean-Luc
(First, Middle, Family Name or Surname)
Second inventor's signature Volle Jean-Luc Date JUNE 11, 2002
Residence 3 rue Guillaume Andozille - 31600 EAUNES (FR) FRX Citizenship French
(City, State, Country)
Full Post Office Address 3 rue Guillaume Andozille - 31600 EAUNES (FRANCE)
Rev. 8/99

3 - 00

Full name of third joint inventor REBER Jean Daniel
Third inventor's signature Reber Jean-Daniel Date JUNE 11, 2002
Residence 30 Chemin de Saint Clair - 84120 PERTUIS (FR) FRX Citizenship French
(City, State, Country)
Full Post Office Address 30 Chemin de Saint Clair - 84120 PERTUIS (FRANCE)

Full name of fourth joint inventor _____
Fourth inventor's signature _____ Date _____
Residence _____ Citizenship _____
(City, State, Country)
Full Post Office Address _____

Full name of fifth joint inventor _____
Fifth inventor's signature _____ Date _____
Residence _____ Citizenship _____
(City, State, Country)
Full Post Office Address _____

Full name of sixth joint inventor _____
Sixth inventor's signature _____ Date _____
Residence _____ Citizenship _____
(City, State, Country)
Full Post Office Address _____